



Imax
40 kA

1-phase Type 2 AC power Surge Protector

DS240



The DS240 Type 2 surge protectors are compact devices designed to protect single phase networks at the main switchboard. They provide a common mode protection.

DS240 are available for 230V or 120V AC network and the different distribution systems (TN, TT, IT).

This SPD is based on high energy varistor equipped with thermal disconnectors and failure indicator to comply with standards. Version with a remote signaling for disconnection indication is also available (DS240S).


The DS240 is DIN rail compatible and is built with a plug-in module and a fixed base, which allows an easy and fast maintenance.

Surge protection of 3-Phase AC network is also possible by association of two DS240s (L1 and L2 connected on the first one, L3 and N connected on the second one, and earthing interconnection of both SPDs).


- Compact single-phase Type 2 SPD
- Discharge currents : In : 20 kA / I_{max} : 40 kA
- Common/Differential mode
- Pluggable module
- Remote signaling contact (option)
- Complies with EN 61643-11 and IEC 61643-1

Part number available	Network	Neutral configuration	Protection mode		
			common	differential	Remote signaling
DS240-230/G	230V Single phase	TTFN	•	•	•
DS240S-230/G	230V Single phase	TTFN	•	•	•
DS240-400	230V Single phase	IT	•	•	•
DS240S-400	230V Single phase	IT	•	•	•
DS240-230	230V Single phase	TN	•	•	•
DS240S-230	230V Single phase	TN	•	•	•
DS240-120/G	120V Single phase	TTFN	•	•	•
DS240S-120/G	120V Single phase	TTFN	•	•	•
DS240-120	120V Single phase	TTFN	•	•	•
DS240S-120	120V Single phase	TTFN	•	•	•

Dimensions (In mm)

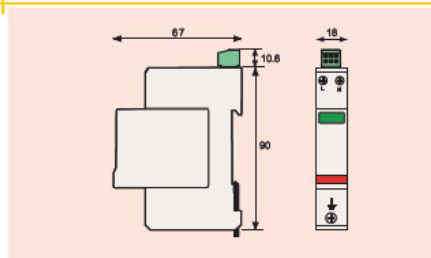

Electrical diagram

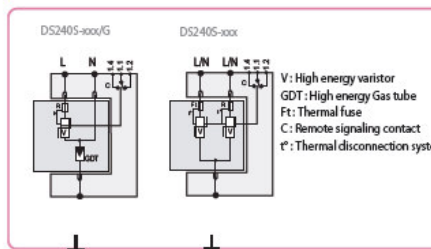

Characteristics

CITEL part number	DS240-400	DS240-230/G	DS240-120/G
Single-phase network	230 V	230 V	120 V
Neutral configuration	TT-TN-IT	TN	TN
Max. operating voltage U _c	400 Vac	255 Vac	150 Vac
Temporary overvoltage withstand U _t	400 Vac	255 Vac	150 Vac
Operating current I _c	< 1 mA	< 1 mA	< 1 mA
Leakage current at U _c	< 1 mA	< 1 mA	< 1 mA
Protection mode(s)	MC(2)	MC/MD (2)	MC/MD (2)
Nominal discharge current I _n	20 kA	20 kA	20 kA
Maximum discharge current I _{max} <small>max. withstand 8/20 μs</small>	40 kA	40 kA	40 kA
Protection level (at I _n) U _p	1.8 kV	1.5/1.25 kV (2)	1.5/0.9 kV (2)
Residual voltage at 5 k	1.3 kV	0.9 kV	0.6 kV
Admissible short-circuit current	10000 A	10000 A	10000 A
Associated disconnection devices			
Thermal disconnector	internal		
Fuses	Fuses type gG - 50 A max. (see Note 1)		
Installation ground fault breaker	Type «S» or delayed		
Mechanical characteristics			
Dimensions	see diagram		
Connection	by screw terminals: 1,5-10 mm ² (L/N) or 2,5-25 mm ² (PE)		
Disconnection indicator	2 mechanical indicators		
Remote signaling of disconnection	Option DS240S - output on changeover contact		
Mounting	symmetrical I rail 35 mm		
Operating temperature	-40/+85 °C		
Protection class	IP20		
Housing material	Thermoplastic UL94V0		
Standards compliance			
NF EN 61643-11	France	Parafoudre Basse Tension - Essais Classe II	
IEC 61643-1	International	Low Voltage SPD - Test Class II	
EN 61643-11	Europe	Low Voltage SPD - Test Class II	
UL1449 ed.2	USA	Low Voltage TVSS	