

Flat cable interfaces according to DIN 41651

on MPS 80 base element



45110 C




45114 A



45118 A/2

Modules with connector strip

- For flat plug connectors with strain relief
- High mechanical security: connector strip screwed on the printed circuit board

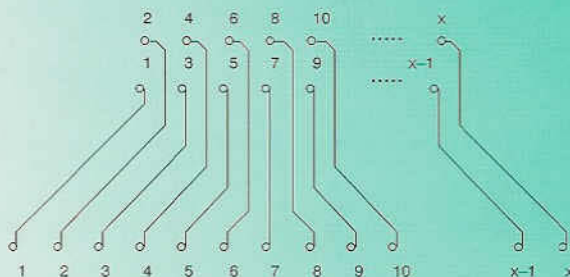

Technical data

Nominal cross-section of the connecting terminals
 Rated voltage
 Rated current load
 Contact material
 Contact plating

Operating temperature

2.5 mm² (AWG 24–14)
 125 V AC
 1 A
 phosphor-bronze
 gold on nickel
 – 20°C to + 40°C

Dimensions L x B x H

Poles

40 x 83 x 58	10
50 x 83 x 58	14
50 x 83 x 58	16
60 x 83 x 58	20
80 x 83 x 58	24
80 x 83 x 58	26
90 x 83 x 58	30
100 x 83 x 58	34
130 x 83 x 58	40
140 x 83 x 58	50
180 x 83 x 58	60
180 x 83 x 58	64

45110 C
45111 A/1
45111 A/2
45112 A
45113 A/1
45113 A/2
45114 A
45115 A
45116 A
45117 A
45118 A/1
45118 A/2