


Woertz AG
 Hofackerstrasse 47
 P.O. Box 948
 CH-4132 Muttenz
 Tel. ++ 41 61/ 466 33 33
 Fax ++ 41 61/ 466 33 31
 E-mail elektronik@woertz.ch
 Internet www.woertz.ch

Multiple contact strips

2.5mm², Pin spacing 5.08mm

Properties

- Number of poles: 2 up to 12 (up to 24 on request)
- Brand labelling or marking by means of adhesive labels
- Standard color: turquoise (matches with the bases for printed circuit boards Woertz)
- Other colors on request

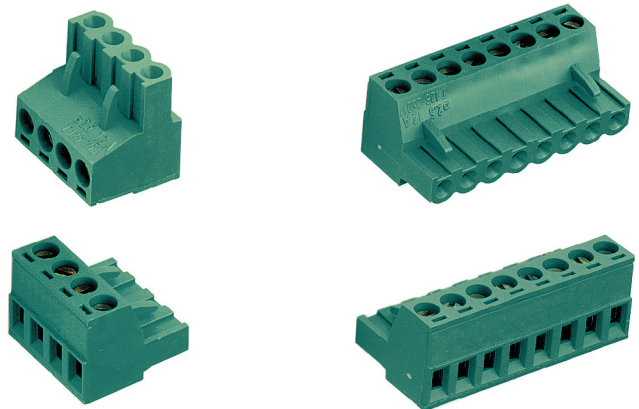

Accessories


- Pin terminal blocks series 31051
- 30413RO cross junction rack 20p red
- 30413BL cross junction rack 20p blue

Approvals

CE  us 12A – 300V

Dimensions

	31251H		31251H
A	15.50	H	∅ 3.80
C	18.80	I	2.80
D	8.30	J	3.10
E	1.00	K	∅ 1.80
F	5.70	P	5.08

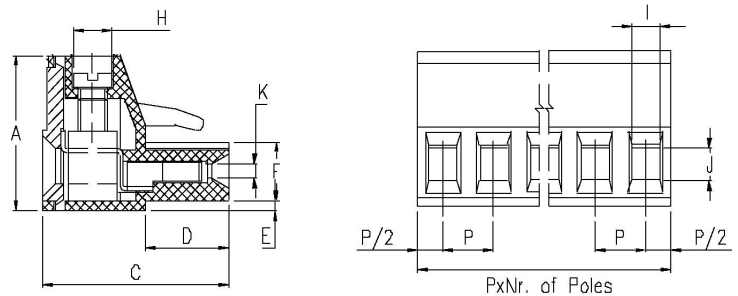

Technical data

Nominal cross-section

Pin spacing

Rated voltage

Rated current

Test voltage

Insulating class

Insulating body

Max. operating temperature

Flammability classification

Comparative Tracking Index

Tightening torque

Clamping screw

Connection pins/ Protective covering of wires

Connecting bar

stranded wires 2.5mm² (14AWG)

solid wire 4.0mm² (12AWG)

5.08mm

250V

12A

2.5kV eff./ 60s (CEI 23-20)

Igr C250

Polyamide 6.6

125°C (UL 746B)

V0 (UL 94)

CTI 400

0.5Nm

M3, galvanized steel

CuZn, tinned

CuZn, nickel-plated

Article No.

Number of poles

- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12

- 31251H/002
- 31251H/003
- 31251H/004
- 31251H/005
- 31251H/006
- 31251H/007
- 31251H/008
- 31251H/009
- 31251H/010
- 31251H/011
- 31251H/012